


CONE MIDRANGE LOUDSPEAKER GDM 18/80

TECHNICAL DATA

Rated impedance	8	15	Ω
Voice coil resistance	7	13,5	Ω
Rated frequency range	0,5 to 9		kHz
Resonance frequency			kHz
Recommended crossover frequency	1		kHz
Power handling capacity, P1/P2			
measured with filter	100/40		W
Max. power	125/50		W
Sensitivity	92		dB
Flux density	1,06		T
Energy in air gap	337,9		mJ
Air - gap	35/6/1,2		mm
Voice coil height			mm
Magnet	7,5	11	
- material	ferrite		
- dimensions	110/60/18		mm
- mass	0,6		kg
Mass of loudspeaker	2		kg

AVAILABLE VERSIONS

- GDM 18/80 - 8 Ω , catalogue number 9 5153 005 01
- GDM 18/80 - 15 Ω , catalogue number 9 5153 005 04

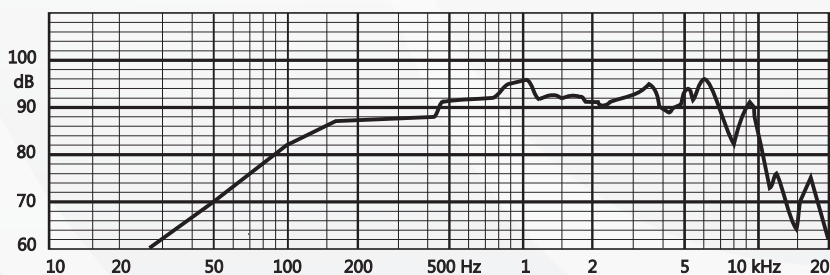

FREQUENCY RESPONSE CURVE

Measured in anechoic room at 1W/1m. Loudspeaker mounted in sealed 5 dm³ enclosure.